

METADEFENDER™

Optical Diode XE

Physically Block Cyberattacks

MetaDefender Optical Diode XE was designed from the ground up for industrial and rugged applications needing an affordable, stable, easy-to-use solution that physically keeps attackers away from protected networks and equipment.



Key Features



Transmit data in a physically-enforced, one-way fashion



Send files and data between segmented networks using TCP, UDP, SFTP, and FTP



Stream industrial Modbus or BACnet data



Convert legacy industrial data to modern JSON formats



Connect to equipment without propriety external servers or software



Obtain data feeds previously out of reach due to cybersecurity concerns





Rapidly bring equipment into the industrial IoT



Designed and manufactured in the USA

METADEFENDER OPTICAL DIODE

Optical Diode XE Ethernet

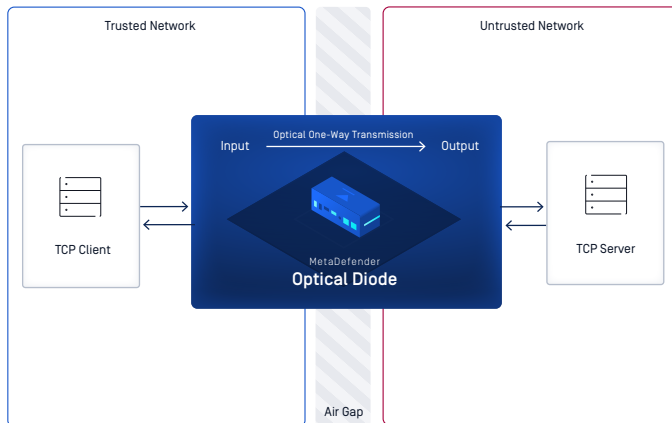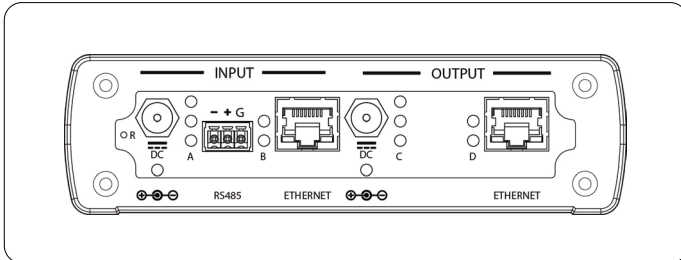

Additional Features

- Denial of Service (DOS) Protection
- Anti-Tamper Protection
- Power Loss/Fluctuation Protection
- Field Configurable
- Optional Secure Hosting of Data in AWS Cloud
- ETL Listed (US, EU, Canada)
- CE, RoHS
- Full optical isolation with independent grounding of each side of the diode

OPSWAT.

Protecting the World's Critical Infrastructure

Specifications

Maximum Data Throughput ¹	XE5	5.0 Mbps
	XE15	15.0 Mbps
	XE50	50.0 Mbps

Dimensions	5.1 x 5.8 x 1.6" (130 x 147 x 41mm)
------------	-------------------------------------

Weight	1.25 lb (.57kg)
--------	-----------------

Isolation Technology	Optical
----------------------	---------

Provided Power Supplies	100–240VAC 1.0A in, 12VDC 1.5A out ²
----------------------------	--

Voltage	12–48 VDC
---------	-----------

Diode Power Consumption (max)	4.0–8.0 W
----------------------------------	-----------

Design Operating Temperature Range	–22 to 158°F [–30 to 70°C]
---------------------------------------	-------------------------------

Connections

Input Side	DC Barrel Jack (O.D. 5.5mm, I.D. 2.1mm, L 9.5mm, Center Positive Polarity)
------------	---

Ethernet RJ-45
Serial RS-485 Combicon MC connector

Output Side	DC Barrel Jack (O.D. 5.5mm, I.D. 2.1mm, L 9.5mm, Center Positive Polarity)
-------------	---

Ethernet RJ-45

Protocols Supported

SFTP, FTP, FTPS³
UDP, TCP, TLS⁴
HTTP/S⁵
Syslog (over UDP or TCP)
Modbus Serial (in), Modbus TCP
BACnet-MSTP (in), BACnet-IP (in)
LON-IP (in)
MQTT (Subscribe/Publish)⁵
Fend Cloud on AWS⁶

OPSWAT Product Compatibility	OPSWAT Screen View OPSWAT Kiosk ⁵ , OPSWAT Managed File Transfer (MFT) ⁵
---------------------------------	--

Fend Cloud Features⁶

Send data securely to cloud-based platform

Monitor the status of diodes remotely via web-based app

Connect with third-party analytics providers using API

1. 5 and 15 series FTPS and TLS maximum speed 4Mbps; SFTP maximum speed 2.8Mbps. 50 series maximum encrypted protocol speeds 32Mbps. Supported serial baud rates: 9600, 19200, 38400, 57600, 115200.

2. Customers can provide their own power supply as long as the output meets the input ratings of the diode. The MetaDefender Optical Diode is designed to be installed in industrial settings such as equipment rooms, control rooms, and IT closets where only adults are normally present.

3. Supports Linux and Windows. Tested with Windows and Linux native FTP, WinSCP, XL Reporter, and CoreFTP.

4. Supports TLS versions 1.0 to 1.3.

5. Available on 50 series only.

6. Requires subscription to Fend Cloud service.