

METADEFENDER™

Optical Diode XE

Physically Block Cyberattacks

MetaDefender Optical Diode XE was designed from the ground up for industrial and rugged applications needing an affordable, stable, easy-to-use solution that physically keeps attackers away from protected networks and equipment.





Key Features

-  Transmit data in a physically-enforced, one-way fashion
-  Connect to equipment without proprietary external servers or software
-  Send files and data between segmented networks using TCP, UDP, SFTP, and FTP
-  Obtain data feeds previously out of reach due to cybersecurity concerns
-  Stream industrial Modbus or BACnet data
-  Rapidly bring equipment into the industrial IoT
-  Convert legacy industrial data to modern JSON formats
-  Designed and manufactured in the USA

METADEFENDER OPTICAL DIODE

Optical Diode XE

Ethernet

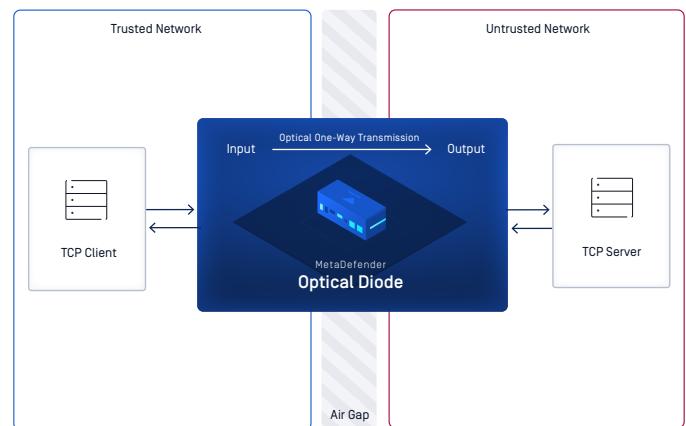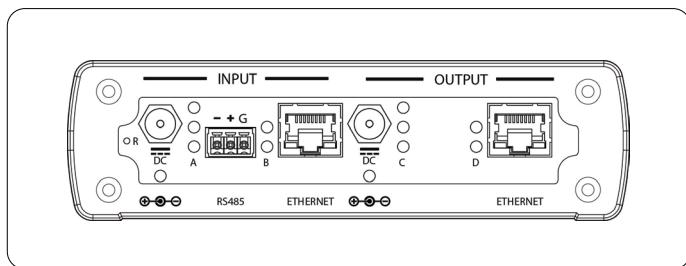

Additional Features

- Denial of Service [DOS] Protection
- Anti-Tamper Protection
- Power Loss/Fluctuation Protection
- Field Configurable
- Optional Secure Hosting of Data in AWS Cloud
- ETL Listed [US, EU, Canada]
- CE, RoHS
- Full optical isolation with independent grounding of each side of the diode

Specifications

Maximum Data Throughput ¹	XE5 XE15 XE50	5.0 Mbps 15.0 Mbps 50.0 Mbps
Dimensions	5.1 x 5.8 x 1.6" (130 x 147 x 41mm)	
Weight	1.25 lb (.57kg)	
Isolation Technology	Optical	
Provided Power Supplies	100–240VAC 1.0A in, 12VDC 1.5A out ²	
Voltage	12–48 VDC	
Diode Power Consumption [max]	4.0–8.0 W	
Design Operating Temperature Range	–22 to 158°F [–30 to 70°C]	

Connections

Input Side	DC Barrel Jack [O.D. 5.5mm, I.D. 2.1mm, L 9.5mm, Center Positive Polarity] Ethernet RJ-45 Serial RS-485 Combicon MC connector
Output Side	DC Barrel Jack [O.D. 5.5mm, I.D. 2.1mm, L 9.5mm, Center Positive Polarity] Ethernet RJ-45
Protocols Supported	SFTP, FTP, FTPS ³ UDP, TCP, TLS ⁴ Syslog Modbus Serial [in], Modbus TCP OPSWAT Screen View BACnet-MSTP [in], BACnet-IP [in] LON-IP [in] MQTT [Fend Cloud on AWS] ⁵

Fend Cloud Features⁵

Send data securely to cloud-based platform

Monitor the status of diodes remotely via web-based app

Connect with third-party analytics providers using API

1. Data throughput may vary depending on network conditions, protocol, and application. 5 and 15 series models FTPS and TLS maximum speed 4Mbps. SFTP maximum speed 2.8Mbps. Supported serial baud rates: 9600, 19200, 36400, 57600, 115200.

2. Customers can provide their own power supply as long as the output meets the input ratings of the diode. The MetaDefender Optical Diode is designed to be installed in industrial settings such as equipment rooms, control rooms, and IT closets where only adults are normally present.

3. Supports Linux and Windows. Tested with Windows and Linux native FTP, WinSCP, XL Reporter, and CoreFTP.

4. 5 and 15 series models support TLS versions 1.0 to 1.2, 50 series models support TLS versions 1.0 to 1.3

5. Requires subscription to Fend Cloud service.

OPSWAT

Protecting the World's Critical Infrastructure